




深沟球轴承 Deep groove ball bearings

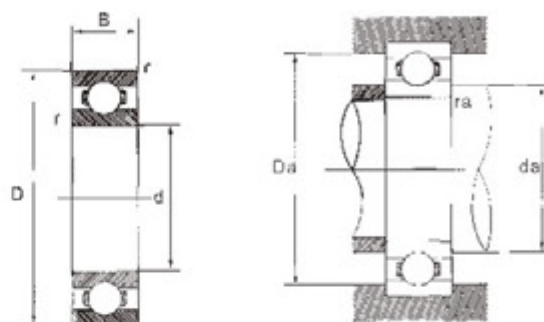

轴承型号 Bearing No.	外型尺寸 Boundary dimensions				Mass 重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440C
683	3	7	2	0.1	0.00024	0.00013	0.00005	0.00032
693		8	3	0.15	0.0005	0.00025	0.0001	0.00061
603		9	3	0.15	0.0007	0.0004	0.0002	0.00087
623		10	4	0.15	0.0013	0.0007	0.0003	0.00165
633	4	13	5	0.15	0.0025	0.0014	0.0006	0.0034
684		9	2.5	0.1	0.0005	0.0003	0.0001	0.0006
694		11	4	0.15	0.0013	0.0007	0.0003	0.0017
604		12	4	0.2	0.0017	0.0009	0.0004	0.0023
624	5	13	5	0.2	0.0023	0.0013	0.0006	0.0030
634		16	5	0.3	0.0040	0.0022	0.0010	0.0052
685		11	3	0.15	0.0009	0.0005	0.0002	0.0012
695		13	4	0.2	0.0019	0.0010	0.0005	0.0025
605	6	14	5	0.2	0.0027	0.0015	0.0007	0.0035
625		16	5	0.3	0.0038	0.0021	0.0010	0.0050
635		19	6	0.3	0.0066	0.0036	0.0016	0.0086
686		13	3.5	0.15	0.0015	0.0008	0.0004	0.0019
696	7	15	5	0.2	0.0030	0.0016	0.0007	0.0039
606		17	6	0.3	0.0046	0.0025	0.0011	0.0060
626		19	6	0.3	0.0063	0.0034	0.0016	0.0086
636		22	7	0.3	0.0108	0.0058	0.0027	0.0140
687	8	14	3.5	0.15	0.0017	0.0009	0.0004	0.0022
697		17	5	0.3	0.0040	0.0022	0.0010	0.0053
607		19	6	0.3	0.0059	0.0032	0.0015	0.0077
627		22	7	0.3	0.0098	0.0053	0.0024	0.0127
637	9	26	9	0.3	0.0185	0.0100	0.0046	0.0240
688		16	4	0.2	0.0025	0.0014	0.0006	0.0072
698		19	6	0.3	0.0056	0.0030	0.0014	0.0072
608		22	7	0.3	0.0093	0.0050	0.0023	0.012
628	10	24	8	0.3	0.013	0.0072	0.0033	0.017
638		28	9	0.3	0.022	0.012	0.0054	0.028
689		17	4	0.2	0.0027	0.0015	0.0007	0.0035
699		20	6	0.3	0.0065	0.0035	0.0016	0.0085
609	11	24	7	0.3	0.011	0.0060	0.0028	0.015
629		26	8	0.3	0.015	0.0081	0.0038	0.020
639		30	10	0.6	0.028	0.015	0.007	0.037
6800		19	5	0.3	0.004	0.0021	0.0010	0.005
6900	12	22	6	0.3	0.007	0.0038	0.0017	0.009
6000		26	8	0.3	0.014	0.0075	0.0035	0.018

轴承型号 Bearing No.	外型尺寸 Boundary dimensions				Mass 重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440C
6200	10	30	9	0.6	0.025	0.013	0.006	0.032
6300		35	11	0.6	0.040	0.022	0.010	0.052
6810		21	5	0.3	0.005	0.0025	0.0012	0.006
6901		24	6	0.3	0.008	0.0042	0.0019	0.01
16001	12	28	7	0.3	0.015	0.0079	0.004	0.019
6001		28	8	0.3	0.017	0.0092	0.004	0.019
6201		32	10	0.6	0.028	0.015	0.007	0.037
6301		37	12	1	0.046	0.025	0.004	0.022
6802	15	24	5	0.3	0.005	0.0029	0.0013	0.007
6902		28	7	0.3	0.012	0.0063	0.003	0.005
16002		32	8	0.3	0.021	0.011	0.005	0.027
6002		32	9	0.3	0.024	0.013	0.006	0.031
6202	17	35	11	0.6	0.035	0.019	0.009	0.045
6302		42	13	1	0.064	0.035	0.016	0.083
6803		26	5	0.3	0.005	0.0029	0.0013	0.007
6903		30	7	0.3	0.013	0.0071	0.0033	0.017
16003	20	35	8	0.3	0.025	0.014	0.006	0.033
6003		35	10	0.3	0.032	0.017	0.008	0.041
6203		40	12	0.6	0.052	0.028	0.013	0.067
6303		47	14	1	0.087	0.047	0.022	0.11
6403	25	62	17	1.1	0.21	0.11	0.052	0.27
6804		32	7	0.3	0.013	0.007	0.003	0.017
6904		37	9	0.3	0.028	0.015	0.007	0.037
16004		42	8	0.3	0.037	0.02	0.009	0.048
6004	30	42	12	0.6	0.052	0.028	0.013	0.068
6204		47	14	1	0.082	0.045	0.021	0.11
6304		52	15	1.1	0.11	0.06	0.028	0.15
6404		72	19	1.1	0.31	0.17	0.08	0.4
6805	35	37	7	0.3	0.016	0.009	0.00	0.021
6905		42	9	0.3	0.032	0.018	0.01	0.042
16005		47	8	0.3	0.045	0.025	0.011	0.059
6005		47	12	0.6	0.061	0.033	0.015	0.079
6205	40	52	15	1	0.099	0.054	0.025	0.13
6305		62	17	1.1	0.18	0.098	0.045	0.24
6405		80	21	1.5	0.41	0.22	0.102	0.53
6806		42	7	0.3	0.018	0.01	0.005	0.024
6906	45	47	9	0.3	0.04	0.022	0.01	0.052
16006		55	9	0.3	0.067	0.036	0.017	0.087



深沟球轴承 Deep groove ball bearings

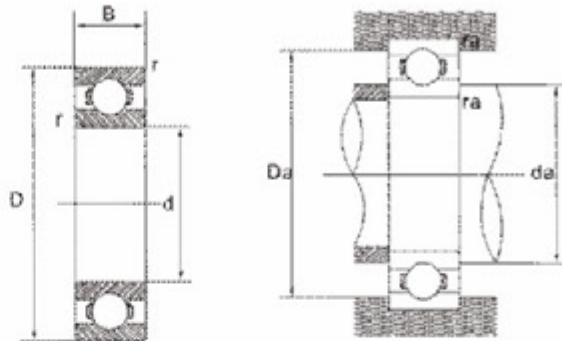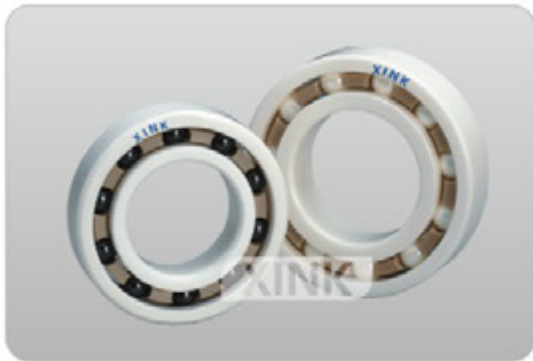

轴承型号 Bearing No.	外型尺寸 Boundary dimensions				Mass 重量 (Kg) (参考) (refer)			
	d	D	B	r(min)	ZrO2	Si3N4	PLASTIC	440C
6006	30	55	13	1	0.089	0.048	0.022	0.116
6206		62	16	1	0.15	0.083	0.038	0.2
6306		72	19	1.1	0.27	0.14	0.066	0.35
6406		90	23	1.5	0.57	0.31	0.14	0.74
6807	35	47	7	0.3	0.021	0.011	0.005	0.027
6907		55	10	0.6	0.058	0.031	0.014	0.075
16007		62	9	0.3	0.082	0.045	0.021	0.11
6007		62	14	1	0.12	0.063	0.029	0.15
6207	40	72	17	1.1	0.22	0.12	0.055	0.28
6307		80	21	1.5	0.36	0.19	0.089	0.46
6407		100	25	1.5	0.73	0.40	0.18	0.95
6808		52	7	0.3	0.02	0.013	0.006	0.03
6908	45	62	12	0.6	0.09	0.05	0.022	0.11
16008		68	9	0.3	0.10	0.05	0.025	0.13
6008		68	15	1	0.15	0.08	0.037	0.19
6208		80	18	1.1	0.28	0.15	0.07	0.37
6308	50	90	13	1.5	0.49	0.27	0.12	0.64
6408		210	27	2	0.946	0.513	0.24	1.230
6809		58	7	0.3	0.029	0.016	0.007	0.038
6909		68	12	0.6	0.097	0.053	0.024	0.13
16009	55	75	10	0.6	0.13	0.07	0.032	0.17
6009		75	16	1	0.19	0.1	0.046	0.24
6209		85	19	1.1	0.32	0.175	0.081	0.42
6309		100	25	1.5	0.64	0.345	0.16	0.83
6409	60	120	29	2	1.18	0.64	0.29	1.53
6810		65	7	0.3	0.038	0.021	0.010	0.05
6910		72	12	0.6	0.1	0.06	0.026	0.14
16010		80	10	0.6	0.13	0.07	0.034	0.18
6010	65	80	16	1	0.20	0.11	0.05	0.26
6210		90	20	1.1	0.35	0.19	0.088	0.46
6310		110	27	2	0.82	0.44	0.2	1.06
6410		130	31	2.1	1.45	0.78	0.36	1.88
6811	70	72	9	0.3	0.06	0.03	0.016	0.08
6911		80	13	1	0.15	0.08	0.036	0.19
16011		90	11	0.6	0.2	0.11	0.049	0.26
6011		90	18	1.1	0.29	0.16	0.073	0.38
6211	75	100	21	1.5	0.48	0.26	0.12	0.62
6311		120	29	2	1.05	0.57	0.26	1.37

轴承型号 Bearing No.	外型尺寸 Boundary dimensions				Mass 重量 (Kg) (参考) (refer)			
	d	D	B	r(min)	ZrO2	Si3N4	PLASTIC	440C
6411	55	140	33	2.1	1.76	0.95	0.44	2.29
6812		78	10	0.3	0.08	0.04	0.02	0.1
6912		85	13	1	0.15	0.08	0.037	0.19
16012		95	11	0.6	0.22	0.12	0.054	0.28
6012	60	95	18	1.1	0.32	0.17	0.079	0.41
6212		110	22	1.5	0.6	0.33	0.15	0.78
6312		130	31	2.1	1.32	0.72	0.33	1.72
6412		150	35	2.1	2.13	1.15	0.53	2.77
6813	65	85	10	0.6	0.1	0.05	0.025	0.13
6913		90	13	1	0.17	0.09	0.04	0.22
16013		100	11	0.6	0.23	0.13	0.06	0.3
6013		100	18	1.1	0.34	0.18	0.08	0.44
6213	70	120	23	1.5	0.77	0.42	0.19	1.00
6313		140	33	2.1	1.62	0.88	0.41	2.11
6413		160	37	2.1	2.54	1.35	0.60	3.3
6814		90	10	0.6	0.1	0.056	0.03	0.13
6914	75	100	16	1	0.27	0.15	0.07	0.35
16014		110	13	0.6	0.34	0.18	0.08	0.44
6014		110	20	1.1	0.47	0.25	0.12	0.61
6214		125	24	1.5	0.84	0.45	0.21	1.09
6318	80	150	35	2.1	1.98	1.07	0.49	2.57
6414		180	42	3	3.71	1.98	0.87	4.83
6815		95	10	0.6	0.011	0.06	0.029	0.15
6915		105	16	1	0.28	0.15	0.070	0.36
16015	85	115	13	0.6	0.36	0.09	0.089	0.46
6015		115	20	1.1	0.5	0.27	0.12	0.65
6215		130	25	1.5	0.92	0.5	0.23	1.19
6315		160	37	2.1	2.37	1.26	0.55	3.08
6415	90	190	45	3	4.52	2.41	1.05	5.87
6816		100	10	0.6	0.12	0.063	0.03	0.15
6916		110	16	1	0.3	0.16	0.075	0.39
16016		125	14	0.6	0.48	0.26	0.12	0.62
6016	95	125	22	1.1	0.67	0.36	0.17	0.87
6216		140	26	2	1.09	0.59	0.27	1.42
6316		170	39	2.1	2.82	1.51	0.66	3.67
6416		200	48	3	5.26	2.81	1.23	6.84
6817	100	110	13	1	0.2	0.11	0.051	0.26
6917		120	18	1.1	0.42	0.23	0.11	0.55

深沟球轴承 Deep groove ball bearings

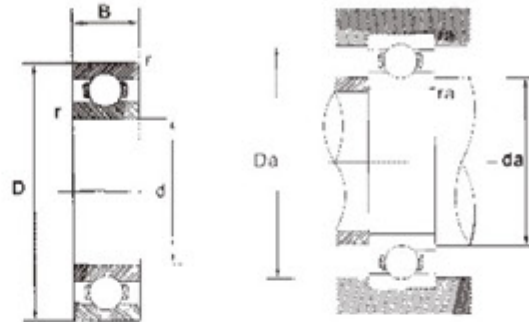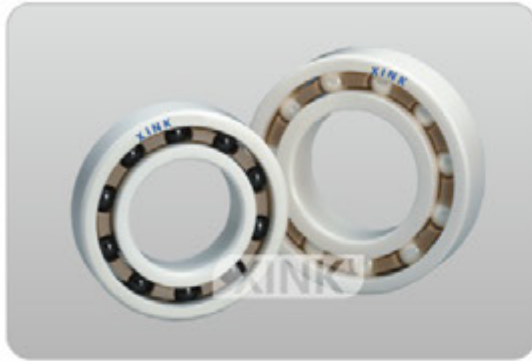

轴承型号 Bearing No	外型尺寸 Boundary dimensions				Mass 重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440C
16017	85	130	14	0.6	0.5	0.27	0.13	0.65
6017		130	22	1.1	0.71	0.38	0.18	0.92
6217		150	28	2	1.35	0.73	0.34	1.76
6317		180	41	3	3.25	1.74	0.76	4.23
6818	90	115	13	1	0.21	0.12	0.05	0.28
6918		125	18	1.1	0.45	0.24	0.11	0.59
16018		140	16	1	0.67	0.36	0.17	0.87
6018		140	24	1.5	0.92	0.5	0.23	1.19
6218	95	160	30	2	1.65	0.88	0.39	2.15
6318		190	43	3	3.78	2.01	0.88	4.91
6819		120	13	1	0.23	0.12	0.057	0.3
6919		130	18	1.1	0.46	0.25	0.12	0.6
16019	100	145	16	1	0.7	0.38	0.17	0.9
6019		145	24	1.5	0.95	0.51	0.24	1.23
6219		170	32	2.1	2.02	1.07	0.47	2.62
6319		200	45	3	4.36	2.33	1.02	5.67
6820	105	125	13	1	0.24	0.13	0.06	0.31
6920		140	20	1.1	0.64	0.35	0.16	0.83
16020		150	16	1	0.73	0.39	0.18	0.95
6020		150	24	1.5	0.99	0.54	0.25	1.29
6220	110	180	34	2.1	2.42	1.29	0.56	3.14
6320		215	47	3	5.38	2.87	1.26	7.0
6821		130	13	1	0.25	0.14	0.06	0.32
6921		145	20	1.1	0.66	0.36	0.16	0.86
16021	115	160	18	1	0.92	0.49	0.22	1.2
6021		160	26	2	1.22	0.65	0.29	1.59
6221		190	36	2.1	2.85	1.52	0.66	3.7
6321		225	49	3	6.19	3.30	1.44	8.05
6822	120	140	16	1	0.38	0.21	0.1	0.5
6922		150	20	1.1	0.69	0.37	0.17	0.89
16022		170	19	1	1.12	0.6	0.26	1.46
6022		170	28	2	1.51	0.8	0.35	1.96
6222	125	200	38	2.1	3.35	1.8	0.78	4.36
6322		240	50	3	7.34	3.91	1.71	9.54

轴承型号 Bearing No	外型尺寸 Boundary dimensions				Mass 重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440C
6824	120	150	16	1	0.41	0.22	0.1	0.54
6924		165	22	1.1	1.08	0.58	0.25	1.41
16024		180	19	1	1.38	0.74	0.32	1.8
6024		180	28	2	1.6	0.85	0.37	2.07
6224	130	215	40	2.1	3.96	2.11	0.92	5.15
6324		260	55	3	9.62	5.13	2.24	12.5
6824		165	18	1.1	0.72	0.39	0.17	0.94
6924		180	24	1.5	1.43	0.76	0.33	1.86
16026	140	200	22	1.1	2.07	1.10	0.48	2.69
6026		200	33	2	2.43	1.30	0.57	3.16
6226		230	40	3	4.48	2.39	1.04	5.82
6326		280	58	4	11.6	6.2	2.71	15.1
6828	150	175	18	1.1	0.77	0.41	0.18	1.00
6928		190	24	1.5	1.52	0.81	0.36	1.98
16028		210	22	1.1	2.20	1.17	0.51	2.86
6028		210	33	2	2.73	1.46	0.64	3.55
6228	160	250	42	3	5.73	3.06	1.34	7.45
6328		300	62	4	14.9	7.96	3.48	19.4
6830		190	20	1.1	1.08	0.57	0.25	1.40
6930		210	28	2	2.35	1.25	0.55	3.05
16030	170	225	24	1.1	2.75	1.47	0.64	3.58
6030		225	35	2.1	3.25	1.73	0.76	4.22
6230		270	45	3	7.24	3.86	1.69	9.41
6330		320	65	4	20.15	10.74	4.70	26.2
60/22	22	44	12	0.6	0.057	0.030	0.013	0.074
62/22		50	14	1	0.092	0.049	0.021	0.119
60/22		56	16	1.1	0.138	0.073	0.032	0.179
60/28		52	12	0.6	0.074	0.039	0.017	0.096
62/28	28	58	16	1	0.135	0.072	0.031	0.175
63/28		68	18	1.1	0.221	0.118	0.052	0.287
60/32		58	13	1	0.094	0.050	0.022	0.122
62/32		65	17	1	0.173	0.092	0.040	0.225
63/32	32	75	20	1.1	0.299	0.160	0.070	0.389